





TECHNICAL DATA AND Standard EQUIPMENT

- Capacity 360 litres
- 1ST category linkage
- 260rpm reduced gearbox with high resistance tempered gears
- Stainless steel hopper, disc, vanes, gates, drag spindle and all bolts and nuts
- Hot galvanized chassis followed by two powder coating layers RAL 2011
- Reinforced P.T.O shaft
- Hot-dip galvanized stainless steel filtering grid
- Anti-tilt support foot
- Stainless steel deflector to limit the spreading width

MODELS:

Code	Description
S915.209	S 503 L INOX (360 L) Salt Version

OPTIONAL ATTACHMENTS:

Code	Description
A002.026	Stainless steel w heel agitator
A002.022-C	Stainless steel chain agitator
T004.067	Protecting cover
I003.015	Road lights
K001.192-K	Set of 2nd category lifting pins
G006.127	Manually operated sector deflector (instead of the standard)



Hot-dip galvanized filter grid



CAPACITY



WEIGHT

TECHNICAL DATA AND STANDARD EQUIPMENT


- Capacity 500 - 640 - 780 litres
- 1st e 2nd category linkage with two link positions
- 260rpm reduced gearbox with high resistance tempered gears
- Stainless steel hopper, disc, vanes, gates and hopper bottom. All components of the adjusting and measuring system, drag spindle and bolts & nuts are in stainless steel
- Adjustable spreading lever
- Hot galvanized chassis followed by two powder coating layers RAL 2011
- Reinforced P.T.O. shaft
- Stainless steel filtering grid
- Hydraulic opening/closing control (Electronic only for ELT version)
- Road lights
- Protection cover
- Stainless steel deflector to limit the spreading width

MODELS:

Code	Description
S936.003-260	SALTSPREADER SANSONE
S936.006	SALT SPREADER SANSONE ELECTRIC

OPTIONAL ATTACHMENTS:

Code	Description
A002.019-C	Stainless steel agitator for powdered fertilizers and salt
A002.023-C	Stainless steel chain agitator
R002.096	140 l. Stainless steel extension
G006.125	Sized deflector with manual control in place of standard
G006.126	Sized deflector with electric control in place of standard
F001.070	Cable ISO 11786 for Forward Speed Detection
F001.071	Cable to detect Speed from phonic wheel
F001.050	Cable from battery supply (ELT models)



CAPACITY



WEIGHT



TECHNICAL DATA AND STANDARD EQUIPMENT

- Capacity 800 - 1000 - 1200 litres
- 2nd and 3rd category linkage with two link positions
- 260rpm reduced gearbox with high resistance tempered gears
- Stainless steel hopper, disc, vanes, gates and hopper bottom. All components of the adjusting and measuring system, drag spindle and bolts & nuts are in stainless steel
- Adjustable spreading lever
- Hot galvanized chassis followed by two powder coating layers RAL 2011
- Reinforced P.T.O. shaft
- Stainless steel filtering grid
- Hydraulic opening/closing control (Electronic only for ELT version)
- Road lights
- Protection cover
- Stainless steel deflector to limit the spreading width

MODELS:

Code	Description
S935.004-260	SALT SPREADER ERCOLE
S935.008	SALT SPREADER ELECTRIC ERCOLE

OPTIONAL ATTACHMENTS:

Code	Description
A002.019-C	Stainless steel agitator for powdered fertilizers and salt
A002.023-C	Stainless steel chain agitator
R002.089	200 l. Stainless steel extension
G006.123	Sized deflector with manual control in place of standard
G006.124	Sized deflector with electric control in place of standard
F001.070	Cable ISO 11786 for Forward Speed Detection
F001.071	Cable to detect Speed from phonic wheel
F001.050	Cable from battery supply (ELT models)

OPTIONAL ATTACHEMENTS FOR SALT SPREADER



Set of 2nd category lifting pins
For SL model



Stainless steel wheel agitator
for SL model




Stainless steel agitator
For SANSONE-ERCOLE
models



Stainless steel chain agitator
for SL-SANSONE-ERCOLE
models




Protecting cover
(on request) for SL. model
Standard for Ercole - Sansone model

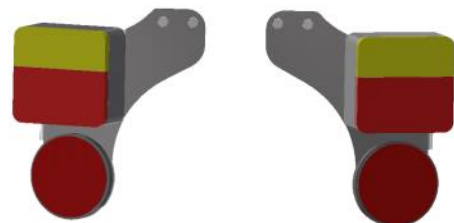


Road lights with stainless steel support
(on request) for SL. model
Standard for Ercole-Sansone model


OPTIONAL ATTACHEMENTS FOR SALT SPREADER

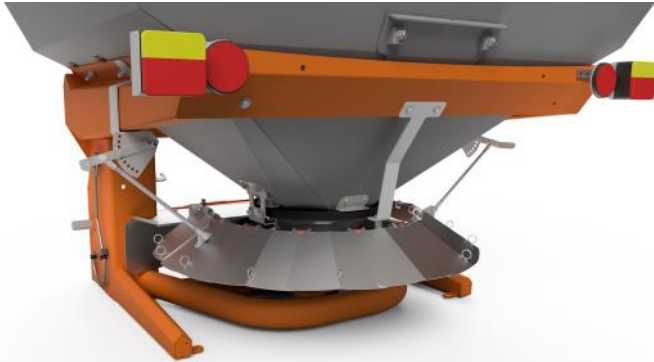

Manually operated sector deflector
(instead of the standard)
For SL- Sansone- Ercole models

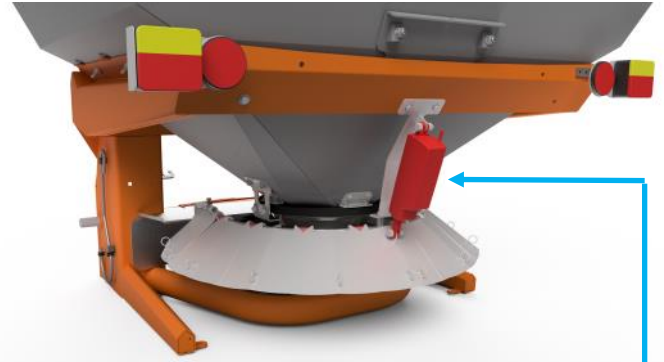

Electrically operated sector deflector
(instead of the standard)
For Sansone- Ercole models

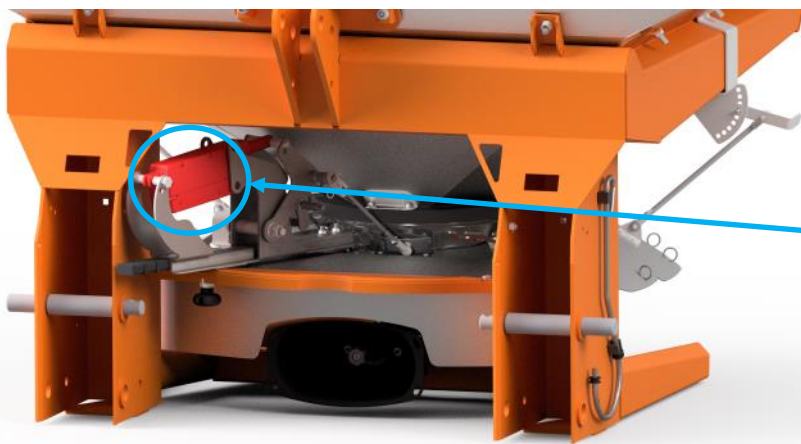

Salt spreader with electric opening and closing
(For Ercole e Sansone models)



Remote control for opening
and closing dispensing or for
sector deflector adjustment

Single Disc Trailed Spreader
 Spreading width up to 12 metres

TECHNICAL DATA AND STANDARD EQUIPMENT

- Capacity 360 litres
- Wheels 4.50 x 10" 6 PR
- Gearbox with moulded high resistance gears.
- Vanes with adjustable spreading angle to optimize distribution
- Vibro system (vibrating hopper bottom without drag spindle nor agitator)
- Disengagement of the transmission
- Filtering grid
- Remote control to open and close gates



N.B. machine not approved for circulation on public roads

MODELS:

Code	Description
S928.003	SCR 360 (360 L)
S928.202	SCR 360 INOX (360 L) with stainless steel hopper, disc, vanes and gates- salt spreader version


OPTIONAL ATTACHMENTS:

Code	Description
G003.076	Additional filtering grid
G006.113	Stainless steel deflector to limit the spreading width
I003.004	Road lights
R008.031	Wheels 20.10.00 x 8" 4 PR (in substitution of the standard)
T004.067	Protecting cover

Choice between two different types of hooks



Tow-eye hook

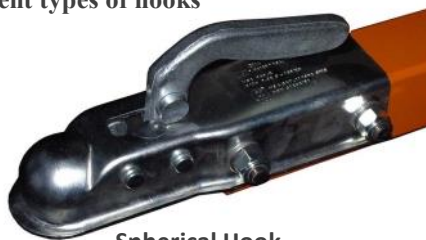


Spherical Hook



Disengagement of the transmission



Additional filtering grid (on request)

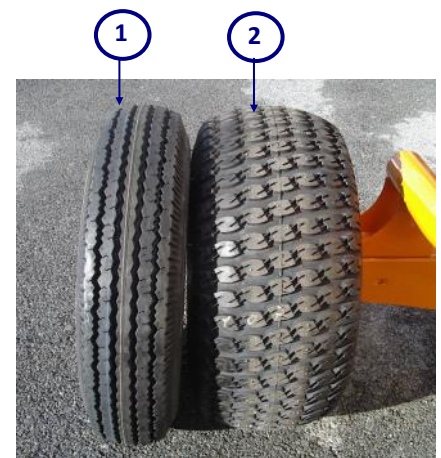

1 - Standard wheels 4.50 x 10" 6 PR
 2 - On-request wheels 20.10.00 x 8" 4 PR for turfs

Trailed Salt Spreader**TECHNICAL DATA AND STANDARD EQUIPMENT:**

- Capacity 560 - 800 litres
- Track 1.5 metres
- Gearbox with moulded high resistance gears
- Disengagement of the spreading disc
- Lower-cone, spreading disc, vanes and drag spindle: all in stainless steel
- Road lights
- Deflector to limit the spreading width

**MODELS:**

Code	Description
S907.004	560 SPS
S907.005	1000 SPS

OPTIONAL ATTACHMENTS:

Code	Description
A002.019-C	Stainless steel agitator for powdered fertilizers and salt
G003.094	Filtering grid

